



32 METER ZZ-FOLD

5 SECTION

BOOM PUMP



JXZZ 32-5.16 *

BOOM SPECIFICATIONS

Vertical Reach	31.4 m (103')
Horizontal Reach	27.4 m (89'10")
Reach from Front - Cabover	25.0 m (82')
Unfolding Height	5.97 m (19'7")
1st Section Length	7.3 m (23'11")
2nd Section Length	5.2 m (17'1")
3rd Section Length	5.0 m (16'5")
4th Section Length	5.0 m (16'5")
5th Section Length	4.9 m (16'1")
Outrigger	X-Style
Front Spread	6.3 m (20'8")
Rear Spread	5.8 m (19')

GENERAL SPECIFICATIONS

Pipe Size (ID)	125 mm (5")
Boom Control Valve	Proportional (by HAWE)
Radio Remote:	Dual Wireless Transmitter System
Vibrator	Standard
Water Pump	Hydraulic Power 20 bar (290 psi)
Water Tank	540 L (143 G)
Wear Parts	Carbide
Popular Upgrades†	LED Boom Light Kit LED Outrigger Lights Heated Water Tank Heated Hydraulic Tank Air-Cuff Twin Wall Pipe 18 or 20 cell Pump Kit Big Mouth S-Tube

† more options available, ask your sales rep for details.

PUMP SPECIFICATIONS

Output	Rod Side	164 m ³ /h (215 yd ³ /h)
	Piston Side	102 m ³ /h (133 yd ³ /h)
Pressure	Rod Side	72 bar (1044 psi)
	Piston Side	115 [†] bar (1668 psi)
Concrete Cylinder Diameter	230 mm (9")	
Concrete Cylinder Type	Hard Chromed	
Stroke Length	2100 mm (83")	
S-Tube Size	8" X 7"	
Main Oil Pump	Rexroth Hydromatic A11VSO260	
Hydraulic System Pressure	350 bar (5076 psi)	
Lube System (Hopper)	Automatic	
Switching System	Hydraulic	
Hopper Capacity	Easy Clean 600 L (158 G)	
Number of Strokes/Min	31	
Output Control Range	10(13)~164m ³ /h(215yd ³ /h)	

† Not to be used through boom pipe.

*Contact your sales representative for alternate chassis options.

www.allianceconcretepumps.com

JXZZ 32-5.16

BOOM PUMP



1.888.584.7231



1.888.870.0908


CABOVER

Reach from front : 25.0m (82')



CONVENTIONAL CAB

Reach from front : 24.4m (80')

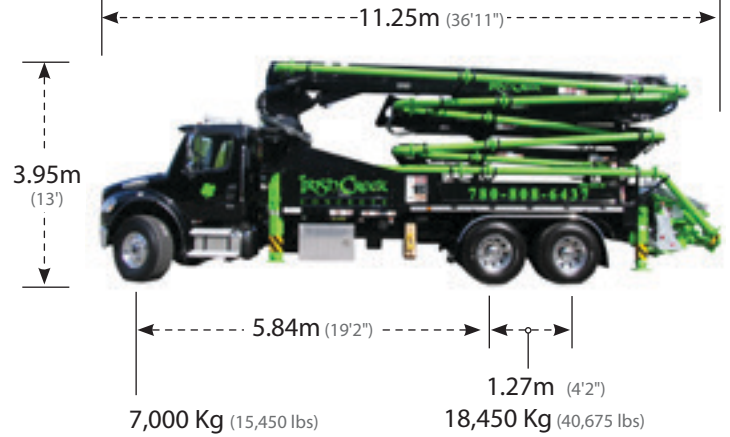

DIAGRAMS

