



# 38 METER R-FOLD

4 SECTION

BOOM PUMP



JXR 38-4.16\*

## BOOM SPECIFICATIONS

Vertical Reach	37.1 m (121'9")
Horizontal Reach	33.1 m (108'7")
Reach from Front - Cabover	30.6 m (100'5")
Unfolding Height	8.7 m (28'7")
1st Section Length	8.7 m (28'7")
2nd Section Length	7.9 m (25'11")
3rd Section Length	8.1 m (26'7")
4th Section Length	8.4 m (27'7")
Outrigger	X-Style
Front Spread	6.3 m (20'8")
Rear Spread	7.0 m (23')

## GENERAL SPECIFICATIONS

Pipe Size (ID)	125 mm (5")
Boom Control Valve	Proportional (by HAWE)
Radio Remote:	Dual Wireless Transmitter System
Vibrator	Standard
Water Pump	Hydraulic Power 20 bar (290 psi)
Water Tank	800 L (211 G)
Wear Parts	Carbide
Popular Upgrades†	LED Boom Light Kit LED Outrigger Lights Heated Water Tank Heated Hydraulic Tank Air-Cuff Twin Wall Pipe 18 or 20 cell Pump Kit Big Mouth S-Tube

†more options available, ask your sales rep for details.

## PUMP SPECIFICATIONS

Output	Rod Side	164 m <sup>3</sup> /h (215 yd <sup>3</sup> /h)
	Piston Side	102 m <sup>3</sup> /h (133 yd <sup>3</sup> /h)
Pressure	Rod Side	72 bar (1044 psi)
	Piston Side	115 <sup>‡</sup> bar (1668 psi)
Concrete Cylinder Diameter	230 mm (9")	
Concrete Cylinder Type	Hard Chromed	
Stroke Length	2100 mm (83")	
S-Tube Size	8" X 7"	
Main Oil Pump	Rexroth Hydromatic A11VSO260	
Hydraulic System Pressure	350 bar (5076 psi)	
Lube System (Hopper)	Automatic	
Switching System	Hydraulic	
Hopper Capacity	Easy Clean 600 L (158 G)	
Number of Strokes/Min	31	
Output Control Range	10(13)~164m <sup>3</sup> /h(215yd <sup>3</sup> /h)	

‡Not to be used through boom pipe.

\*Contact your sales representative for alternate chassis options.

[www.allianceconcretepumps.com](http://www.allianceconcretepumps.com)

# JXR 38-4.16

**BOOM PUMP**




1.888.584.7231



1.888.870.0908


## CABOVER

Reach from front : 30.6m (100'5")

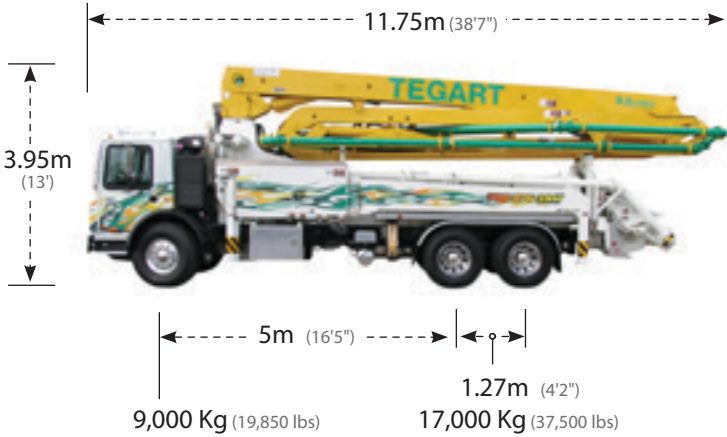

## CONVENTIONAL CAB

Reach from front : 30.1m (98'9")

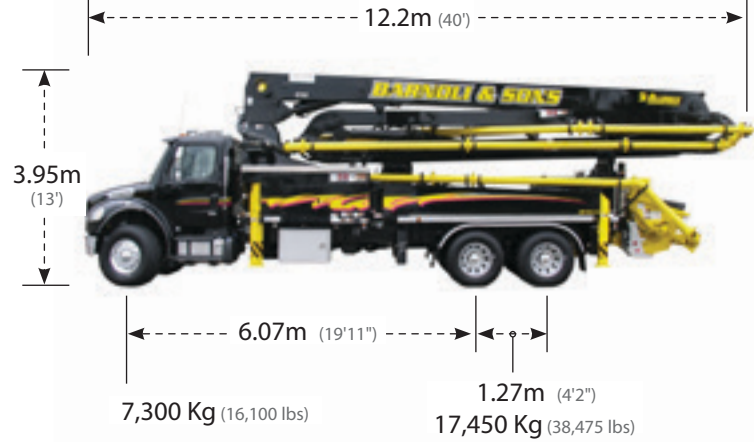

## DIAGRAMS

